# Opti Light

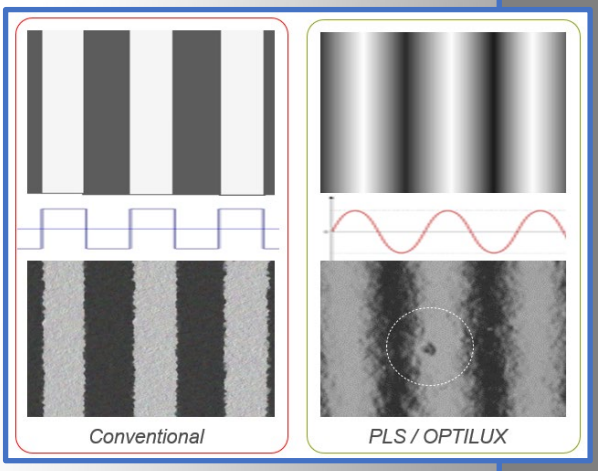


The here described system is equipped with the VIRELUX proprietary PLS light box design. It features a dedicated, sinusoidal profile light emission, improving operator ergonomy and visual accuracy.

Explanation: small defects are more visible in grey level transition zones, than in stepped profile lighting, whilst additionally reducing the needed operator movements.

## Economy Systems
## Wall mounted sets

**Systems featuring master lamp base dimming function and pattern selection**

| | |
|---|---|
| **Length :** | **1200 / 1500 / 1800 / 2100 mm** |
| **Pattern :** | **Plain White / Composite** |
| **Color temperature :** | **4000k / 4000K 3000K 4000K** |
| **Luminosity :** | **from 1000 to 3000 Lux** |
| **Weight:** | **max 75kg each** |
| **Rated power :** | **480W – 230V 50Hz** |

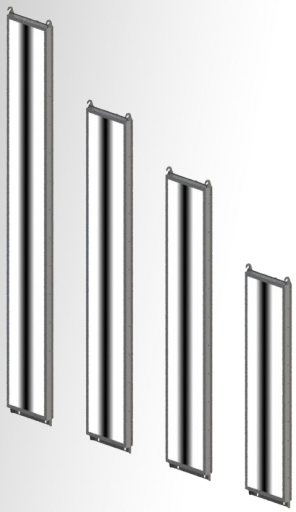

Extended wall mounted set

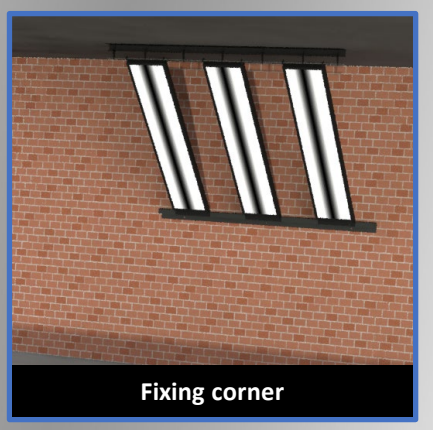
Fixing corner

Fixing cieling

VIRELux Inspection systems

**VIRELUX Inspection Systems sarl**
Avenue Charlotte, 126
L-4531 Differdange, L-4531 Differdange
www.virelux.com Tel : +352 2455 8251

# Opti Light

## Economy Systems
### Single panel

Systems featuring master lamp base
dimming function and pattern selection

| | |
|---|---|
| Length : | 1500 / 2100 mm |
| Pattern : | Plain White / Composite |
| Color temperature : | 4000k / 4000K 3000K 4000K |
| Luminosity : | from 1000 to 3000 Lux |
| Weight: | max 550kg |
| Rated power : | W – 230V 50Hz |

Optional equipement :
- Centalized cabinet
- Motorization top flap

Floor footings

Wall mount

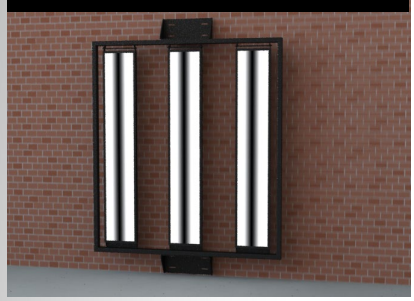

Beam mount

1 add. side flap

2 add. side flaps

1 add. top flap

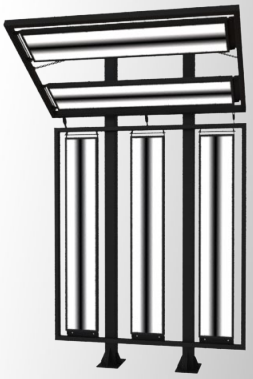

add. side & top flap

add. full flaps

VIRELux Inspection systems

**VIRELUX Inspection Systems sarl**
Avenue Charlotte, 126
L-4531 Differdange, L-4531 Differdange
www.virelux.com Tel : +352 2455 8251